



COLLINGWOOD LIGHTING



FEATURES & BENEFITS

- › Bi-directional, straight to mains wall light, perfect for framing entrances and illuminating columns
- › Equivalent to 35W halogen
- › Solid copper option gradually ages over time to offer a wonderful antique effect



WL070A | WL170A | WL370A

Straight to mains, up / down LED wall light

Suitable for use outdoors
 7-year extended warranty available
 Also available in RGBW (WL070A)

Patent information: [collingwoodlighting.com/patent](http://collingwoodlighting.com/patent)      WL070A / WL170A      WL370A      ZONE      L70, B10      35DCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	18°	WL070A NW	>70Ra	472* 236‡	59	1000
	18°	WL170A NW	>70Ra	472* 236‡	59	1000
	18°	WL370A NW	>70Ra	472* 236‡	59	1000
3000K	18°	WL070A WW	>80Ra	400* 200‡	50	900
	18°	WL170A WW	>80Ra	400* 200‡	50	900
	18°	WL370A WW	>80Ra	400* 200‡	50	900
2700K	18°	WL070A 27*	>80Ra	390* 200‡	49	875
	18°	WL170A 27*	>80Ra	390* 200‡	24	875
	18°	WL370A 27*	>80Ra	390* 200‡	24	875

\*Available on request, please call our team for lead times and MOQ on 01604 495 151 † Combined total from both sets of LED | ‡ Per module

GENERAL

Construction material	WL070A / WL170A: anodised aluminium      WL370A: copper
Inrush current	5A 0.5ms

WIRING


Cable / flying lead	0.3m Live, Neutral & Earth
Type of wiring required	Parallel (mains) 220-240V AC, 50-60Hz

LED DRIVERS


Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	-	No	2	-	-

ACCESSORIES

Product code	Description
There are currently no accessories associated with this product	

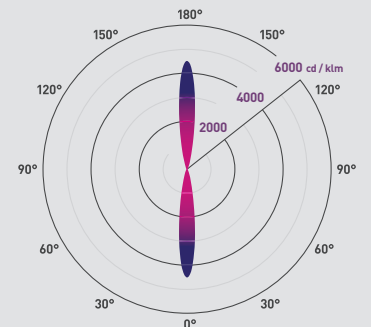

4000K 18°  
Additional diagrams available at [collingwoodlighting.com](http://collingwoodlighting.com)



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012