RF Single Color Remote Controller

09.28335.04331

Important: *Read All Instructions Prior to Installation*

Function introduction

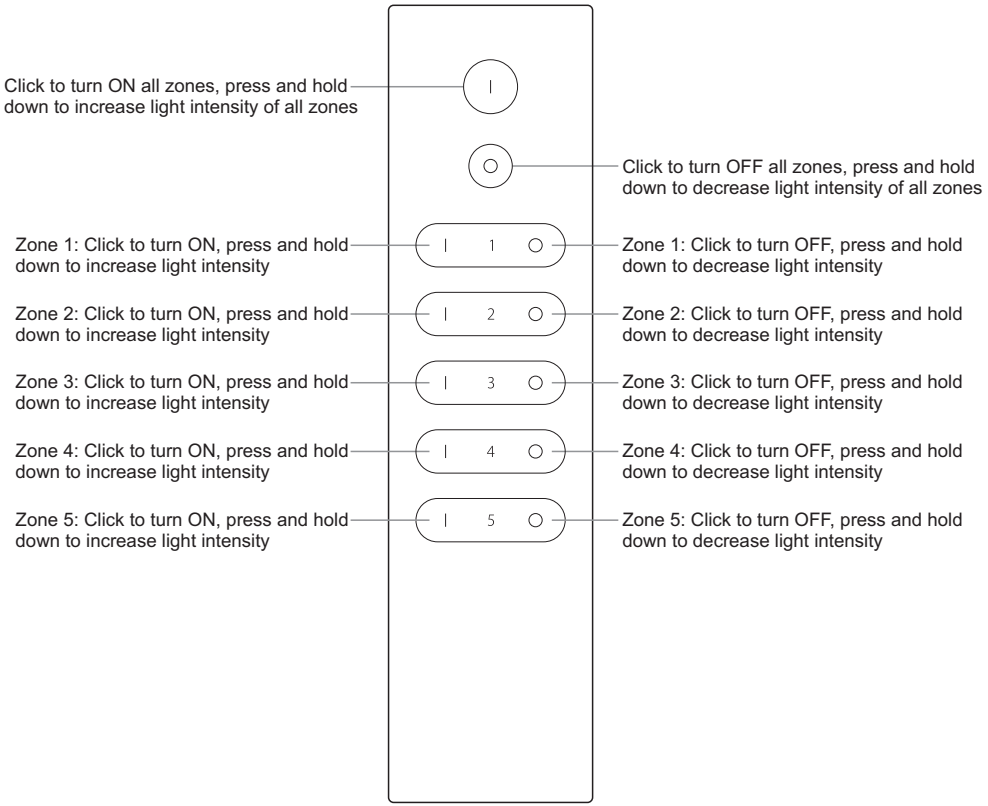

Front side

Note:Before the first use, please remove the protective film on the battery.

Back side

Product Data

Output	RF signal
Operation Frequency	869.5/916.5/434MHz
Power Supply	3V(1xCR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	150x38.6x12mm

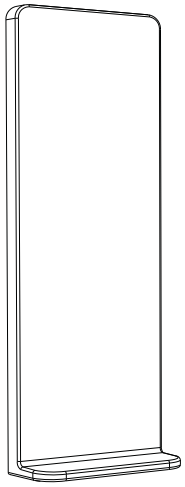

Magnetic Bracket

- Control 5 zones of receivers separately
- Single color controller
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

Operation

1. Pair with RF receivers:

Turn on RF remote → Click “Learning Key” on RF receiver, or re-power on the receiver three times → Click I or O button of any zone → LED lights connected with the receiver flicker once → The receiver is paired with selected zone successfully.

2. How to delete the pairing:

Press and hold down “Learning Key” on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

If you use multiple receivers, you have two choices:

Option 1: have all the receivers in the same zone, like zone 1

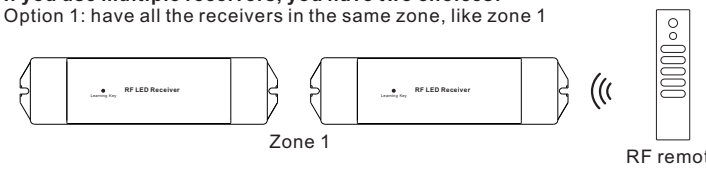

Zone 1

RF remote

Option 2: have each receiver in a different zone, like zone 1, 2, 3 or 4



Zone 1 Zone 2 Zone 3

RF remote